
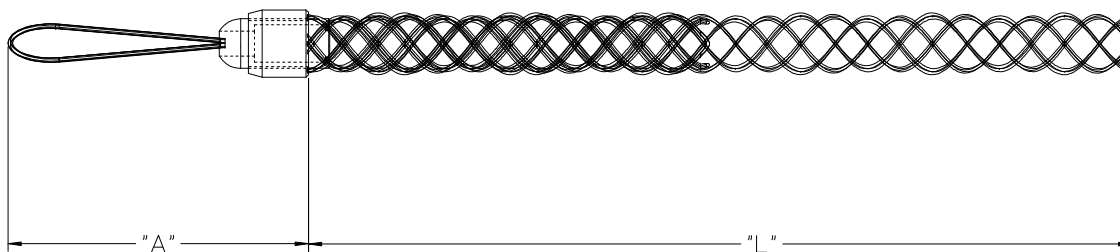


PART NUMBER	OLD PART NUMBER	CABLE RANGE	BREAK STRENGTH (LBS)	"L" (REF)	"A" (REF)
1300950297	36661	.210-.350/5.3-8.9	1500	14.00/355.6	5.50"/139.7
1300950298	36662	.320-.480/8.1-12.1	2200	18.00/457.2	6.00"/152.4
1300950299	36663	.420-.610/10.6-15.4	2800	21.00/533.4	6.00"/152.4
1300950300	36664	.530-.740/13.4-18.7	3300	24.00/609.6	6.50"/165.1
1300950301	36665	.640-.875/16.2-22.2	4700	27.00/685.8	6.50"/165.1

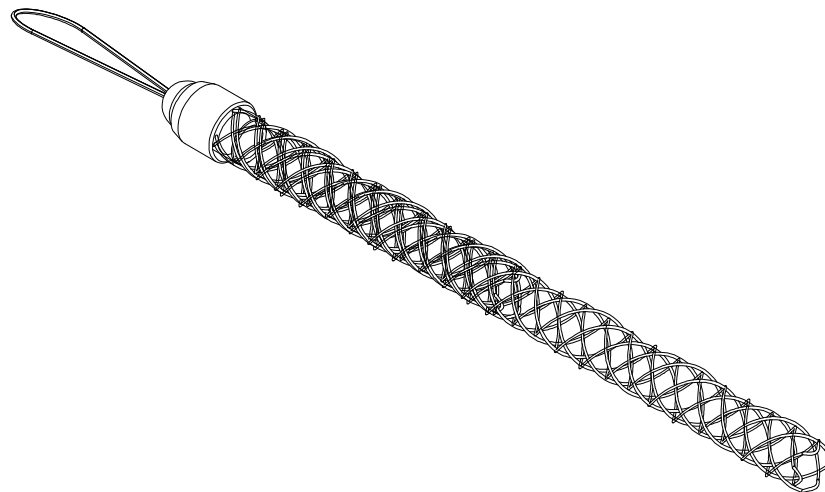

COMPONENT	MATERIAL	FINISH
.031 WIRE 1X7 LH LAY MESH	STEEL	GALVANIZED
COMPONENT	ALUMINUM	NONE
.125 WIRE 7X9 LH LAY BALE	STEEL	GALVANIZED
FLAT WASHER	NYLON 6/6	BLACK
FERRULE	ALUMINUM	NONE
BALE NOSE	CARBON STEEL	ZINC PLATED

<b>ENTER DESCRIPTION</b> EC NO: WNAZ009-0583 DRWNSGARCIA 2009/03/31 CHKDB: WOODMAN APPR: JF MURPHY 2009/04/01	QUALITY SYMBOLS ▼=0 ▽=0
	DESCRIPTION FIBER OPTIC PULLING GRIP

GENERAL TOLERANCES (UNLESS SPECIFIED)																
	<table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>± .005</td> <td>± .0005</td> </tr> <tr> <td>3 PLACES</td> <td>± .005</td> <td>± .0005</td> </tr> <tr> <td>2 PLACES</td> <td>± .01</td> <td>± .001</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.3</td> <td>± .012</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	± .005	± .0005	3 PLACES	± .005	± .0005	2 PLACES	± .01	± .001	1 PLACE	± 0.3	± .012
	mm	INCH														
4 PLACES	± .005	± .0005														
3 PLACES	± .005	± .0005														
2 PLACES	± .01	± .001														
1 PLACE	± 0.3	± .012														
ANGULAR ±1/2°																
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS																

DIMENSION STYLE <b>IN/MM</b>	
DRAWN BY S. G.	DATE 2009/03/11
CHECKED BY B. WOODMAN	DATE 2009/03/16
APPROVED BY JOE MURPHY	DATE 2009/03/20
MATERIAL NO.	
<b>SEE CHART</b>	

SCALE <b>1:5</b>	DESIGN UNITS <b>INCH</b>	THIRD ANGLE PROJECTION
TITLE <b>FIBER OPTIC PULLING GRIP</b>		
MOLEX INCORPORATED		SHEET NO. <b>1 OF 1</b>
DOCUMENT NO. <b>SD-130095-001</b>		