
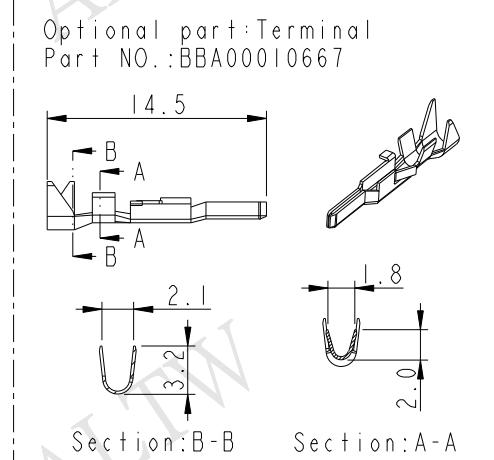
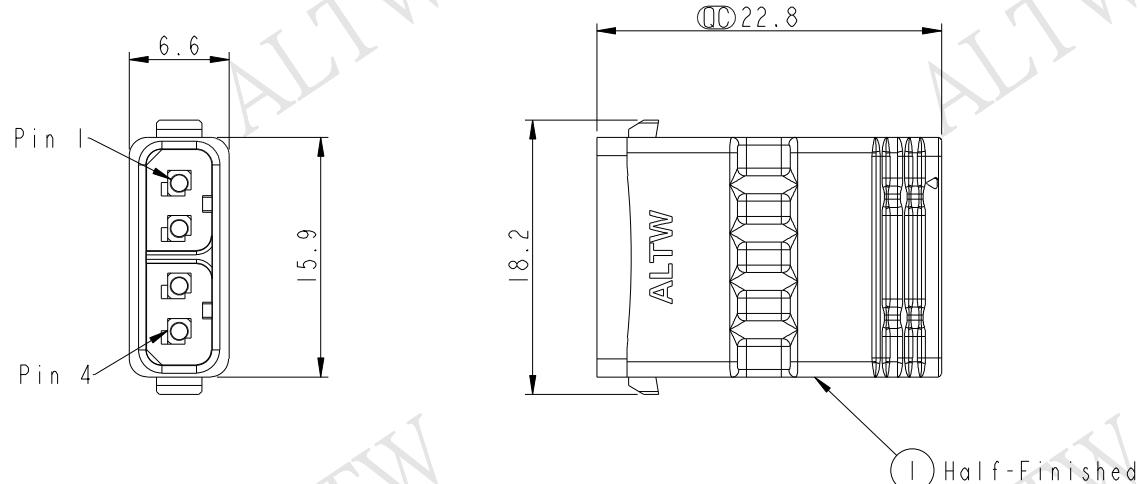
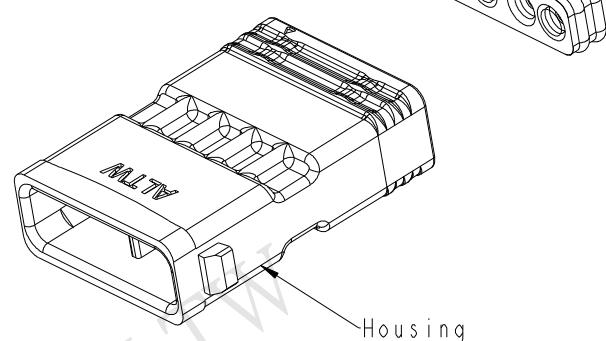



1	2	3	4	5	6	7	8
F	E	D	C	B	A		
				REV.	ECN NO.	DATE	SIGN
				A	Initial Release	2015-04-15	Fisher
				B	LEN1620284	2016-03-02	Fisher
							DESCRIPTION
							Initial Release
							Update Label



Notes:
 * \textcircled{O} Important Dimension To Check.
 * Waterpoof Rate: IP68(mating).
 * IM Depth Of Water In 24 Hours.
 * Housing: Thermoplastic, UL94V-0, Natural White.
 * Seals: Silicone, Gray.
 * Current Rating: 5A maximum.
 * Applicable Wire Range: UL1430, 20~22AWG
 * Voltage Rating: 250V AC/DC maximum.
 * Operating Temperature: -40~+105°C
 * Applicable terminal : BBA00010667

UNIT:mm			TITLE SSL1.2 4P F Conn. Field Installable
TOLERANCE	$\pm 0.5\text{mm}$		SCALE 2:1 SIZE A4 SHEET 1 OF 2
			REV. B WC-REV. A.4 \textcircled{O} : Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO SSL12-J4FJ0-000001	DRAWN BY Fisher_Wang	DATE 2016-03-02
DWG NO SSL12-J4FJ0-000001	CHECKED BY Victor_Hung	DATE 2016-03-02
CUSTOMER LTW	APPROVED BY Kevin_Hu	DATE 2016-03-02

